


PG STAGED DRILL BIT | 678014

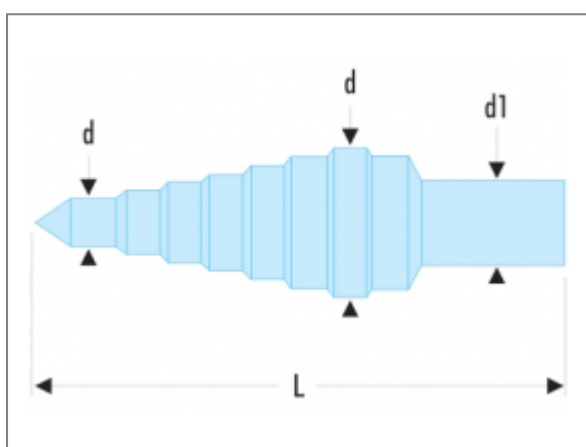

Description

- For cylindrical high accuracy drilling in all diameters.
- Does not require a tapping hole.
- Cylindrical shank with 3 flats for proper drive, avoiding micro locking.
- Marking of different diameters.
- 678014: Special PG cable gland.
- Panel drilling capacity up to 4 mm thickness.
- Shank diameter 10 mm.
- Min - max diameter: 6 - 9 - 12.5 - 15.2 - 18.6 - 20.4 - 22.5 - 26 - 28.3 - 30.5 - 34 - 37 mm.
- Length 100 mm.

Information

d mini - maxi [mm]	6,0 - 9,0 - 12,5 - 15,2 - 18,6 - 20,4 - 22,5 - 26,0 - 28,3 - 30,5 - 34,0 - 37,0
d1 [mm]	10
L [mm]	100
[g]	300