


B

ISO ME 6

Rear rectangular flange mounting
Rechteckigen Bodenflansch
Bride rectangulaire arriere
BRIDA RECTANGULAR TRASERA

Nominal pressure
Nenndruck
Pression nominale
Presión nominal

160
bar

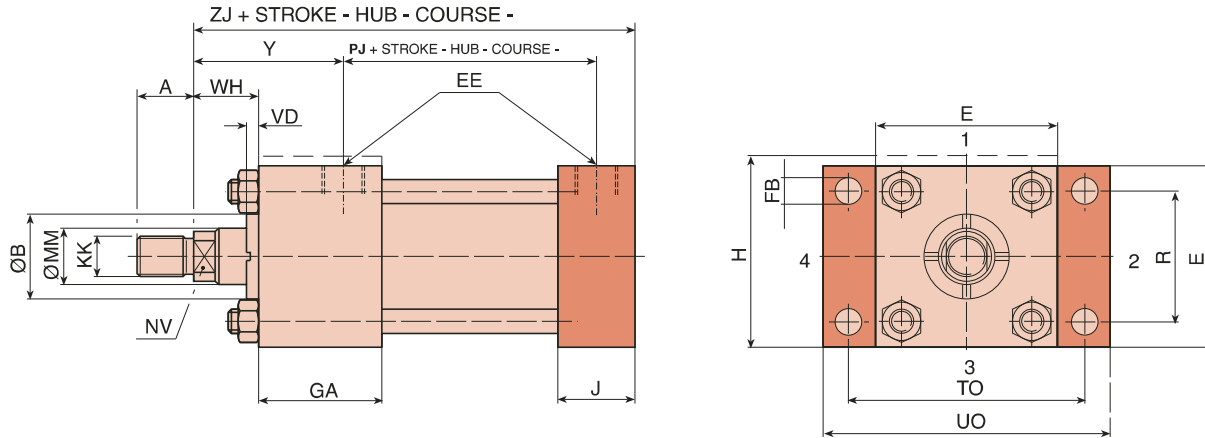

Location of cushioning-screws, side 3 - Lage der Dämpfungsschrauben, Seite 3 - Position des vis de réglage d'amortissement, face 3 - Posición regulador amortiguación, lado 3

	25		32		40		50		63		80		100		125		160		200		
	MM	MM	MM	MM	MM	MM	MM	MM	MM	MM	MM	MM	MM	MM	MM	MM	MM	MM	MM	MM	
A _{h15}	1	14	16	18	22	28	36	45	56	63	85										
	2	18	22	28	36	45	56	63	85	95	112										
B _{p9}	24	30	26	34	30	42	34	50	42	60	50	72	60	88	72	108	88	133	108	163	
E	40	45	63	75	90	115	130	165	205	245											
EE	1/4"G	1/4"G	3/8"G	1/2"G	1/2"G	3/4"G	3/4"G	1"G	1"G	1 1/4"G											
FB _{H13}	5,5	6,6	11	14	14	18	18	22	26	33											
GA	50	50	55	61	61	70	72	80	83	101											
H	45	50	-	-	-	-	-	-	-	-											
J	25	25	38	38	38	45	45	58	58	76											
KK	1	M10x1,25	M12x1,25	M14x1,5	M16x1,5	M20x1,5	M27x2	M33x2	M42x2	M48x2	M64x3	M48x2	M48x2	M48x2	M48x2	M48x2	M48x2	M48x2	M48x2	M48x2	M64x3
	2	M14x1,5	M16x1,5	M20x1,5	M27x2	M33x2	M42x2	M48x2	M48x2	M48x2	M64x3	M80x3	M80x3	M80x3	M80x3	M80x3	M80x3	M80x3	M80x3	M80x3	M100x3
NV	10	15	12	18	15	22	18	30	22	36	30	46	36	60	46	80	60	100	80	120	
PJ _{±1,25}	53	56	73	74	80	93	101	117	130	165											
R _{js13}	27	33	41	52	65	83	97	126	155	190											
TO _{js13}	51	58	87	105	117	149	162	208	253	300											
UO	65	70	110	130	145	180	200	250	300	360											
VD	6	12	12	9	13	9	10	10	7	7											
WH	15	25	25	25	32	31	35	35	32	32											
Y _{±2}	50	60	62	67	71	77	82	86	86	98											
ZJ _{±1}	114	128	153	159	168	190	203	232	245	299											